


Rack ovens - INSPIRE

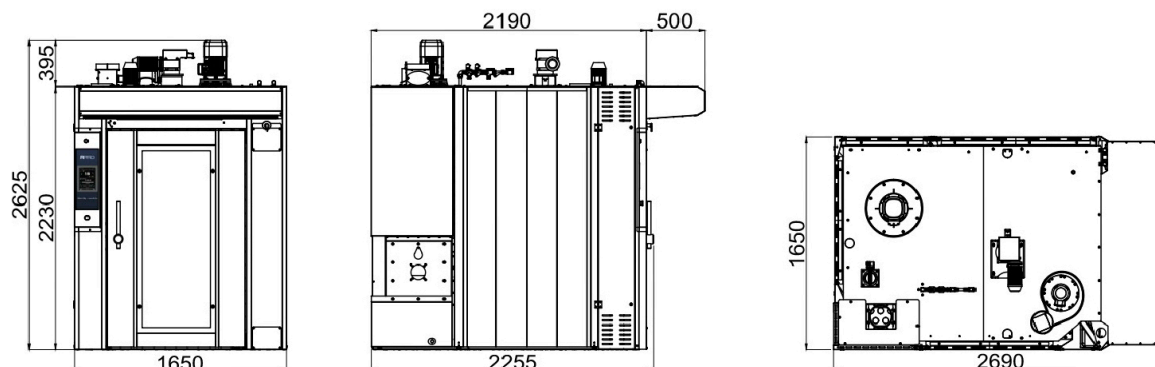

DATA SHEET

External dimensions	mm 1650x2200x2625
Structure	Robust and masterful construction in AISI 430 stainless steel material internally and externally. Burning chamber in AISI 310 and 321 stainless steel. Insulation thickness 120mm with high thermal insulation mat. Adjustable door hinges. Oven base thickness 30mm. Large amount of steam production. Efficient and uniform air circulation over the entire height of the baking chamber.
Tray size	mm 800x800 mm 800x900 mm 600x1000
n° of trays	18
Distance between trays	87 mm
Max rack height for oven with platform	1765 mm
Thermal power	70.000 Kcal/h 60 Kw
Baking surface	10,80 sqm
Total weight	1.550 Kg
Steam volume	550 mc/h
Maximum operating temperature	300°C
Internal light	n.2 halogen lamps
Water inlet diameter	1/2"
Steam outlet diameter	180 mm
Chimney diameter	197 mm
Water drain diameter	3/4"
Min - Max flow Natural Gas (G20)	7 ~ 17.5 Nmc/h
Temperature sensor	Thermocouple J
Controller	With touch screen front panel of 7"
Power supply Voltage	3/N - 400V 50Hz
Absorbed Current	8,5A
Absorbed Power	3,2 Kw

OPTIONS

Assembly	Oven assembly performed in the company. The oven is shipped fully assembled
Automatic steam exhaust opening	Automatic steam outlet gate managed directly by the controller
Refractory bricks	Internal lining of the baking chamber in refractory bricks.
Eyebolts	Set of 4 oven lifting eyebolts
Platform	Racks rotation system on platform
Cover	Metal covering of moving parts and aspirators

CODE

IN-165-G