


Retarder Prover Room - MASTER

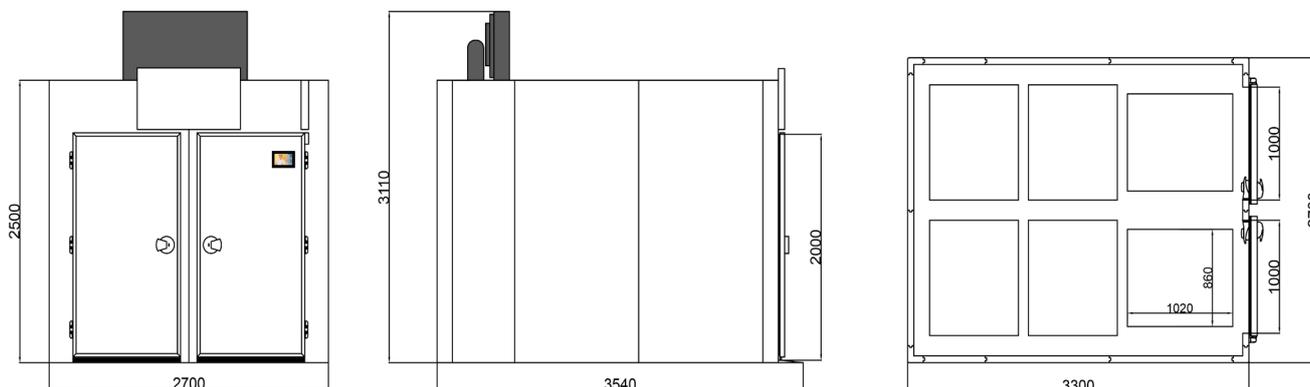

DATA SHEET

External dimensions	mm 2700x3300x2500h
Internal dimensions	mm 2380x3000x1980h
Maximum external height	mm 3160
Structure	Prefabricated modular panels with thickness of insulation 60mm. Polyurethane rigid foam without CFC and density 38/40 Kg/mc. Sanitary profiles on the floor and ceiling
Floor	Without floor
Internal finishing	White painted galvanized sheet
External finishing	White painted galvanized sheet
Doors – entry	n.2 mm1000x2000h – industrial closing
Capacity of racks - trays	n.6 for trays mm 800x1000
Evaporator	n.2 with four fans Ø 250mm
Evaporator capacity	9940 Watt a 2°C room / -8°C evaporation
Fans absorption	520 Watt
Tropicalized condensing unit	n.1 ermetic Tecumseh compresor of 6,5 Hp with n.2 fans. Dimensions mm 1200x770x595h. Pump Down. High and low pressure switch
Condensing unit capacity	9673 Watt at -10°C evaporation / 38°C condensation
Defrosting resistances	n.2 of 1800 Watt
Heating elements	n.4 of 2500 Watt
Steam generator	n.3 of 2000W S/S - non-water contact resistance
Temperature range	-5 / +40 °C
Humidity range	50 – 100 %
Temperature probe	n.1 0-10 Volt
Humidity probe	n.1 0-10 Volt
Internal light	n.2 leds of mm500
Master controller	n.1 electronic with touch screen 7"
Voltage	Volt 3x400+N 50Hz
Gas	R452a
Maximum absorption	17 Kw.

OPTIONS

Remote Access	Complete remote room management. E-mail alarms notification.
Internal finishing	Stainless steel AISI 304 18/10
External finishing	Stainless steel AISI 304 18/10
External front finishing	Stainless steel AISI 304 18/10
Floor – Version A	Phenolic multilayer wood panel thickness 21mm + s/s ramp
Floor – Version B	Insulated and reinforced floor, thickness of insulation 60mm with exposed phenolic multilayer wood panel + s/s ramp
Floor – Version C	Insulated and reinforced floor, thickness of insulation 60mm with anti-slip stainless steel AISI 304 18/10 finishing + s/s ramps.
Remote condensing unit	n.1 Silenced and tropicalized with Tecumseh compressor of 7Hp + accessories – Volt 3x400+N, 50Hz – distance 10m
Extra heat function	Activating the extra heat function (n.2 of 2500W) in the Manual Proving programme
Door Glass	Double toughened glass mm 300x300

CODE

MA100-2P-270x330