


Prover Room - START

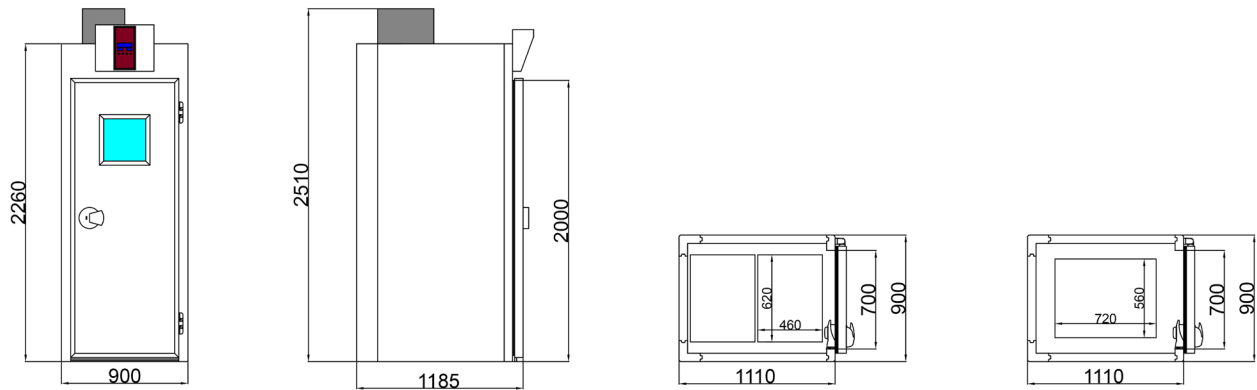

DATA SHEET

| | |
|---------------------------|---|
| External dimensions | mm 900x1110x2260h |
| Internal dimensions | mm 700x990x1950h |
| Maximum external height | mm 2600 |
| Structure | Prefabricated modular panels with thickness of insulation 60mm. Polyurethane rigid foam without CFC and density 38/40 Kg/mc. Sanitary profiles on the floor and ceiling |
| Floor | Without floor |
| Internal finishing | White painted galvanized sheet |
| External finishing | White painted galvanized sheet |
| Doors – entry | n.1 mm 700x2000h – industrial closing |
| Capacity of racks - trays | n.2 for trays mm 600x400 n.1 for trays mm 500x700 |
| Heating elements | n.1 of 1500 Watt |
| Steam generator | n.1 of 500 Watt non-water contact resistance |
| Temperature range | Ambient / +40 °C |
| Humidity range | Ambient / 100 % |
| Temperature probe | n.1 Ntc |
| Humidity probe | n.1 4-20mA |
| Internal light | no |
| Avant controller | n.1 Digital with LCD display and 4 programming keys |
| Voltage | Volt 1x230+N 50Hz |
| Maximum absorption | 2,5 Kw. |

OPTIONS

| | |
|--------------------------|--|
| Internal finishing | Stainless steel AISI 304 18/10 |
| External finishing | Stainless steel AISI 304 18/10 |
| External front finishing | Stainless steel AISI 304 18/10 |
| Floor | Phenolic multilayer wood panel thickness 21mm + s/s ramp |

CODE

ST70-1P-90x110