


# Prover Room - START

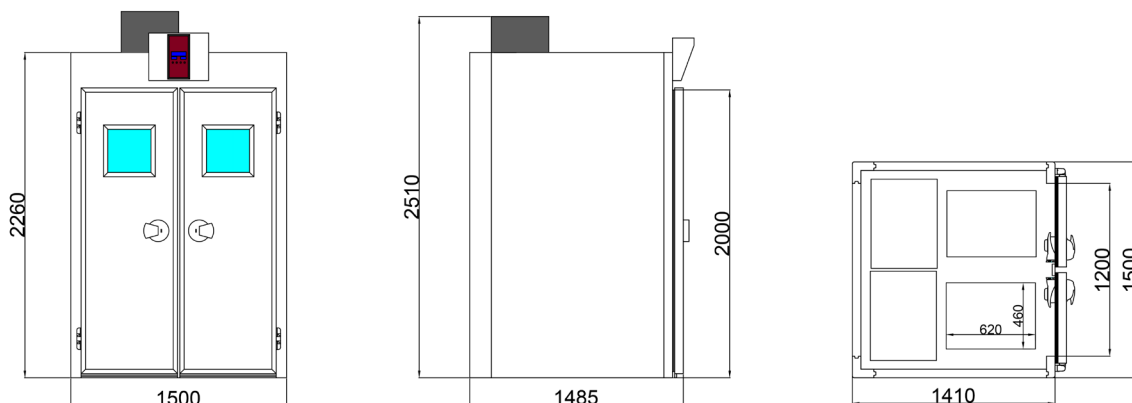

## DATA SHEET

External dimensions	mm 1500x1410x2260h
Internal dimensions	mm 1220x1290x2260h
Maximum external height	mm 2600
Structure	Prefabricated modular panels with thickness of insulation 60mm. Polyurethane rigid foam without CFC and density 38/40 Kg/mc. Sanitary profiles on the floor and ceiling
Floor	Without floor
Internal finishing	White painted galvanized sheet
External finishing	White painted galvanized sheet
Doors – entry	n.2 mm 1200x2000h – dictator closing
Capacity of racks - trays	n.4 for trays mm 400x600
Heating elements	n.2 of 1500 Watt
Steam generator	n.1 of 1000 Watt non-water contact resistance
Temperature range	Ambient / +40 °C
Humidity range	Ambient / 100 %
Temperature probe	n.1 Ntc
Humidity probe	n.1 4-20mA
Internal light	n.1 lamp
Avant controller	n.1 Digital with LCD display and 4 programming keys
Voltage	Volt 3x400+N 50Hz
Maximum absorption	4,5 Kw.

## OPTIONS

Internal finishing	Stainless steel AISI 304 18/10
External finishing	Stainless steel AISI 304 18/10
External front finishing	Stainless steel AISI 304 18/10
Floor	Phenolic multilayer wood panel thickness 21mm + s/s ramp

## CODE

ST120-2P-150x141